

Strong, Smooth, Quiet – Rolled Into One Great Door

TRAC-RITE®

SILL PLATE FOR ROLL-UP DOORS



944

944^{WL}

955

955^{WL}

988

988^{WL}

Features.

- Strong, Durable Materials
- Easy Installation
- Custom Sizes
- Low Maintenance
- Rust Resistant

Details Matter.

That's why we designed Trac-Rite's sill plate for our line of roll-up doors. The sill plate is the perfect final touch for structures with plywood floors, or anywhere that an extra layer of defense against water seepage is desired.

Formed from heavy 20 gauge G90 galvanized steel, the sill plate provides years of protection against wear, standing up to foot and vehicle traffic. Available in sizes from 5' to 10' in 1' increments.

INSTALLATION


- Fit sill plate into opening and if required, field trim the sill plate to desired width
- Pre-drill evenly spaced holes every approximately 6" on the most interior edge of the sill plate (past the retaining contour)
- Use 1.5" fasteners (not included) that are appropriate to the floor substrate and secure the sill plate to substrate or use a commercial grade adhesive applied to the underside of the sill plate to attach it



Trac-Rite's zinc-coated sill plate provides protection against sill damage and water intrusion.



A small ridge on the sill plate provides an extra layer of defense against water from running seeping into the structure.

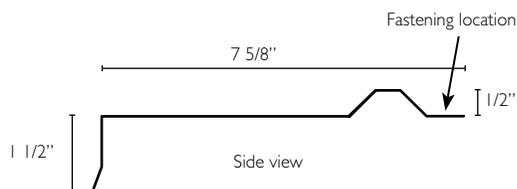

Part No.	Width
502521	4'
502522	5'
502523	6'
502524	7'
502525	8'
502526	9'
502572	10'



For more information

PHONE 800 448 8979
FAX 800 236 8722
LOCAL FAX 608 237 2528
WEBSITE www.tracrite.com
EMAIL tr@tracrite.com
ADDRESS 314 Wilburn Road
Sun Prairie, WI 53590